



Cant.	Descriere
-------	-----------



**Date electrice:**

Putere de introdus - P1:	9 .. 92 W
Frecven a re elei electrice:	60 Hz
Tensiune nominal :	1 x 230 V
Curent consumat maxim:	0.09 .. 0.74 A
Grad de protec ie (IEC 34-5):	X4D
Clas de izolare (IEC 85):	F

**Altele:**

Energie (EEI):	0.20
Greutate net :	4.5 kg
Greutate brut :	5 kg
Volum de livrare:	0.013 m <sup>3</sup>
Finnish LVI No.:	4615250
ara de origine:	DE
Nr. tarif:	84137030

## 99221217 MAGNA1 25-60 60 Hz

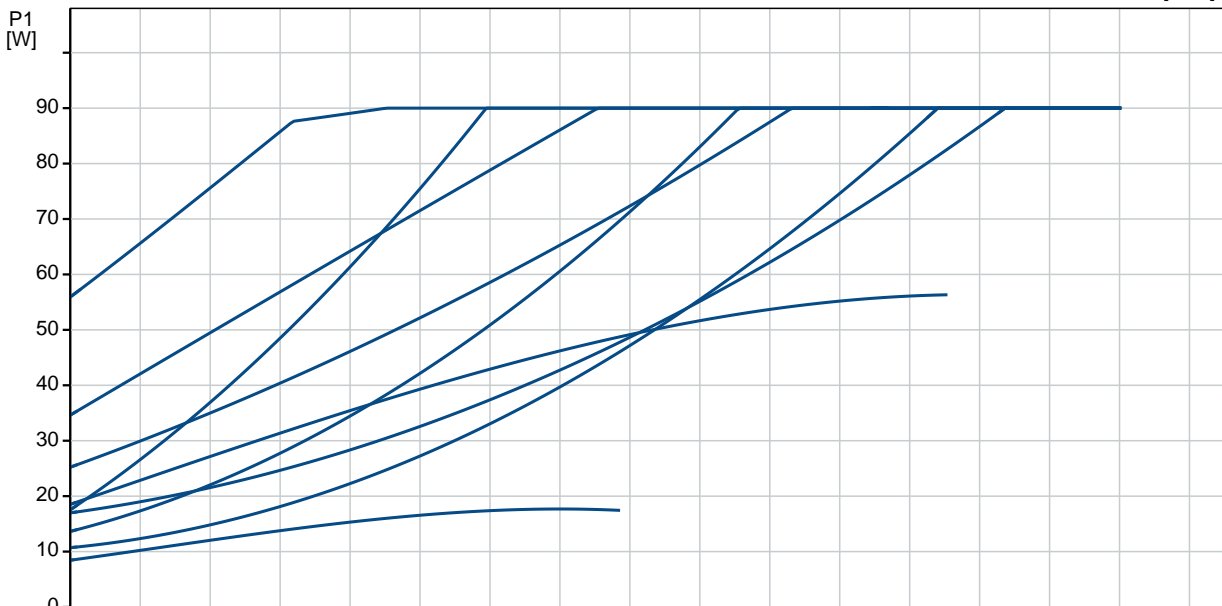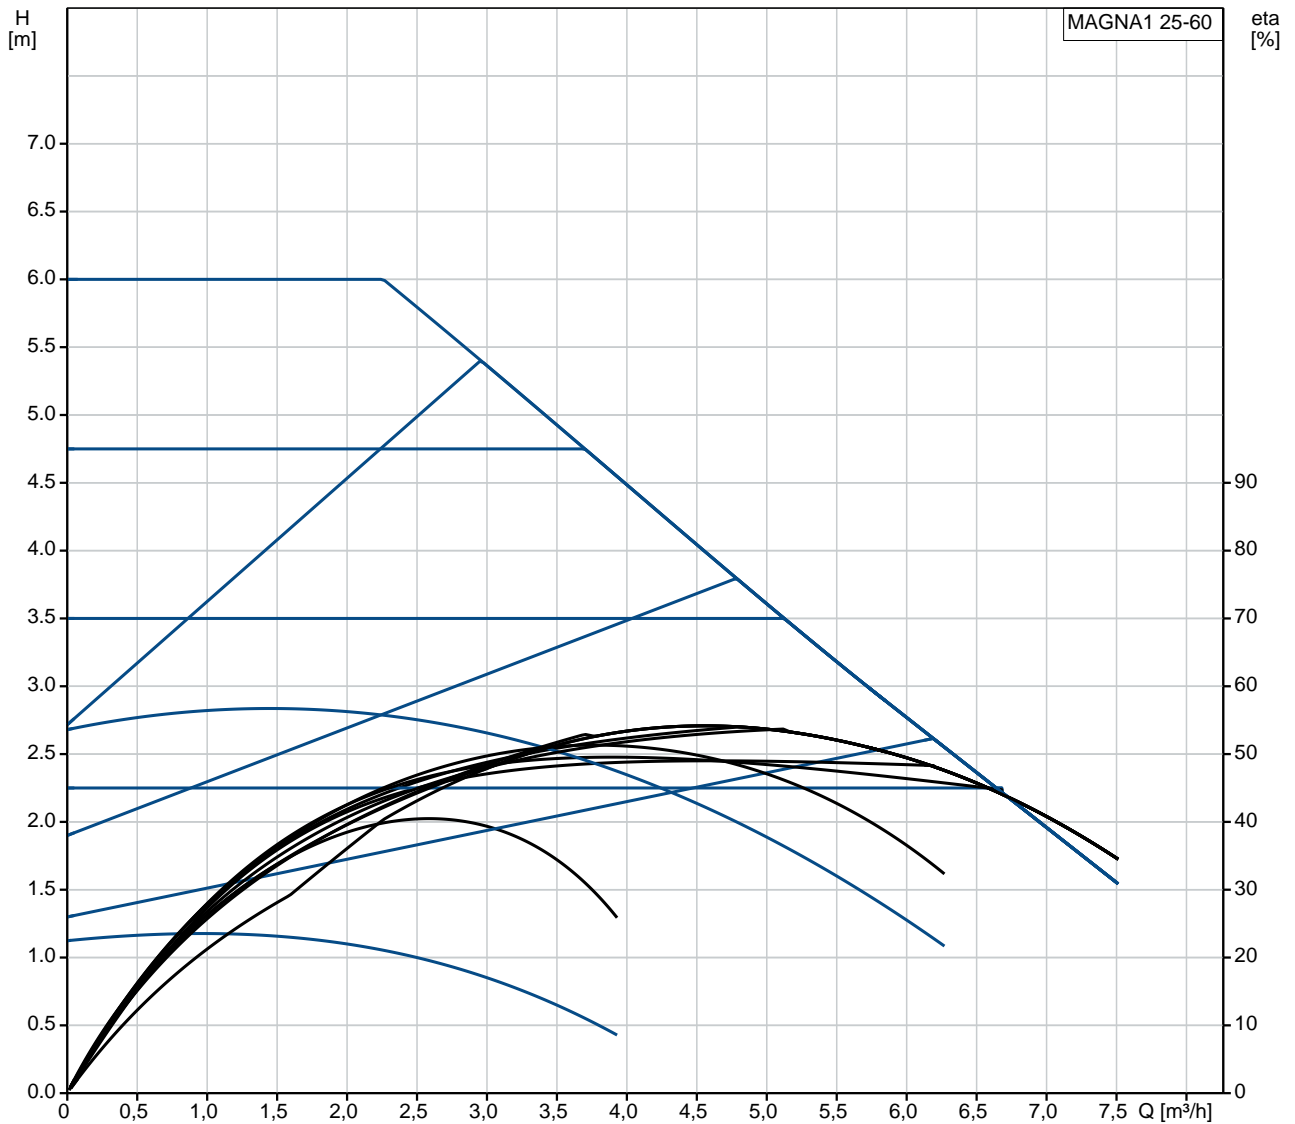

Descriere	Valori i tipuri
<b>Informa ii generale:</b>	
Nume produs::	MAGNA1 25-60
Nr. produs::	99221217
Numărul EAN::	5712608941900
	5712608941900
Pre :	484,07 EUR
<b>Tehnic:</b>	
În l ime de pompare max.:	60 dm
Clasa TF:	110
Aprob ri pe etichet :	CE,VDE,EAC,CN ROHS,WEEE
Model:	C
<b>Materiale:</b>	
Corpul pompei (stator):	Font
	EN-GJL-200
Corpul pompei:	ASTM A48-200B
Rotor:	PES 30%GF
<b>Instala ie:</b>	
Gama temperaturii ambientale:	0 .. 40 °C
Presiune de func ionare maxim :	10 bar
Racordarea pompei la instala ie:	G 1 1/2"
Presiune maxim de func ionare:	PN10
Distan a dintre porturi:	180 mm
<b>Lichid:</b>	
Lichid pompat:	Ap
Gama temperaturii lichidului:	-10 .. 110 °C
Temperatura lichidului în timpul func ion rii:	60 °C
Densitate la temperatura lichidului selectat :	983.2 kg/m <sup>3</sup>
<b>Date electrice:</b>	
Putere de introdus - P1:	9 .. 92 W
Frecven a re elei electrice:	60 Hz
Tensiune nominal :	1 x 230 V
Curent consumat maxim:	0.09 .. 0.74 A
Grad de protec ie (IEC 34-5):	X4D
Clas de izolare (IEC 85):	F
<b>Altele:</b>	
Energie (EEI):	0.20
Greutate net :	4.5 kg
Greutate brut :	5 kg
Volum de livrare:	0.013 m <sup>3</sup>
Finnish LVI No.:	4615250
ara de origine:	DE
Nr. tarif:	84137030

