

Cant.	Descriere
-------	-----------

1	<b>MAGNA3 25-60</b>
---	---------------------



Not ! Poza de produs poate diferi de produsul actual

Nr. Produs: [97924245](#)

The Grundfos MAGNA3 is a circulator pump with permanent magnet motor that will fit both heating, cooling and domestic hot water circulation applications perfectly, making it the obvious choice for almost any building project – old or new.



With its unrivalled efficiency, all-encompassing range and built-in communication capabilities plus functionalities replacing system components, the MAGNA3 is ideal for building owners, engineers and specifiers looking to create high-performance systems for buildings.

The MAGNA3 is a canned-rotor type, i.e. pump and motor form an integral unit without shaft seal and with only two gaskets for sealing. The bearings are lubricated by the pumped liquid.

The innovative clamp with only one screw enables easy repositioning of the pump head.

The MAGNA3 is a pump with no maintenance requirements and with extremely low Life Cycle Cost.

## 97924245 MAGNA3 25-60

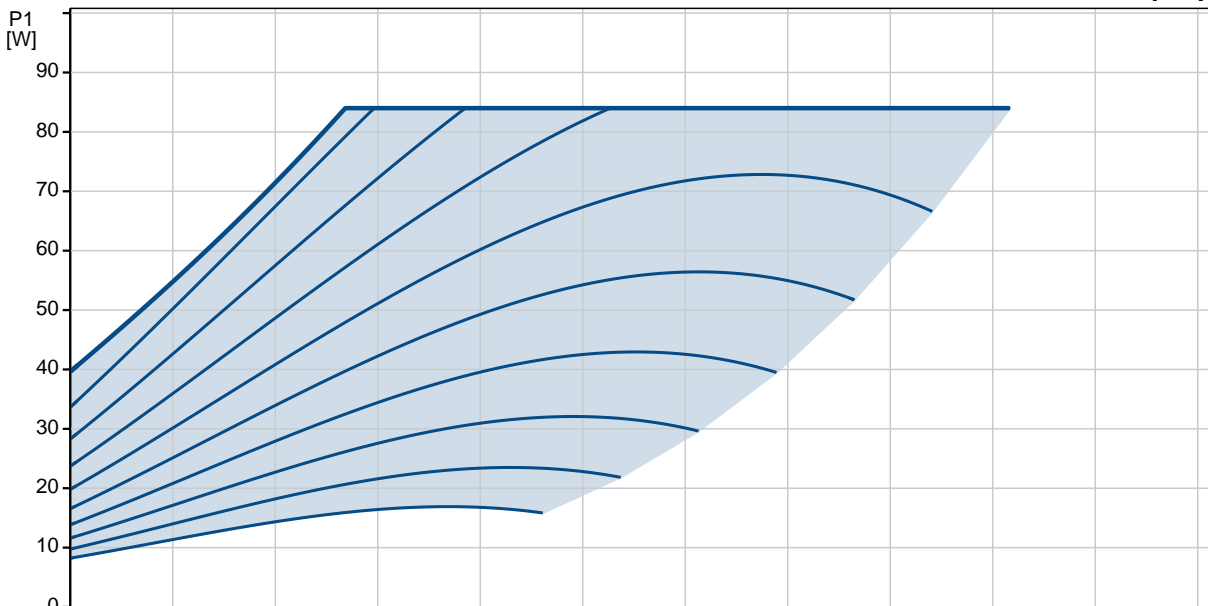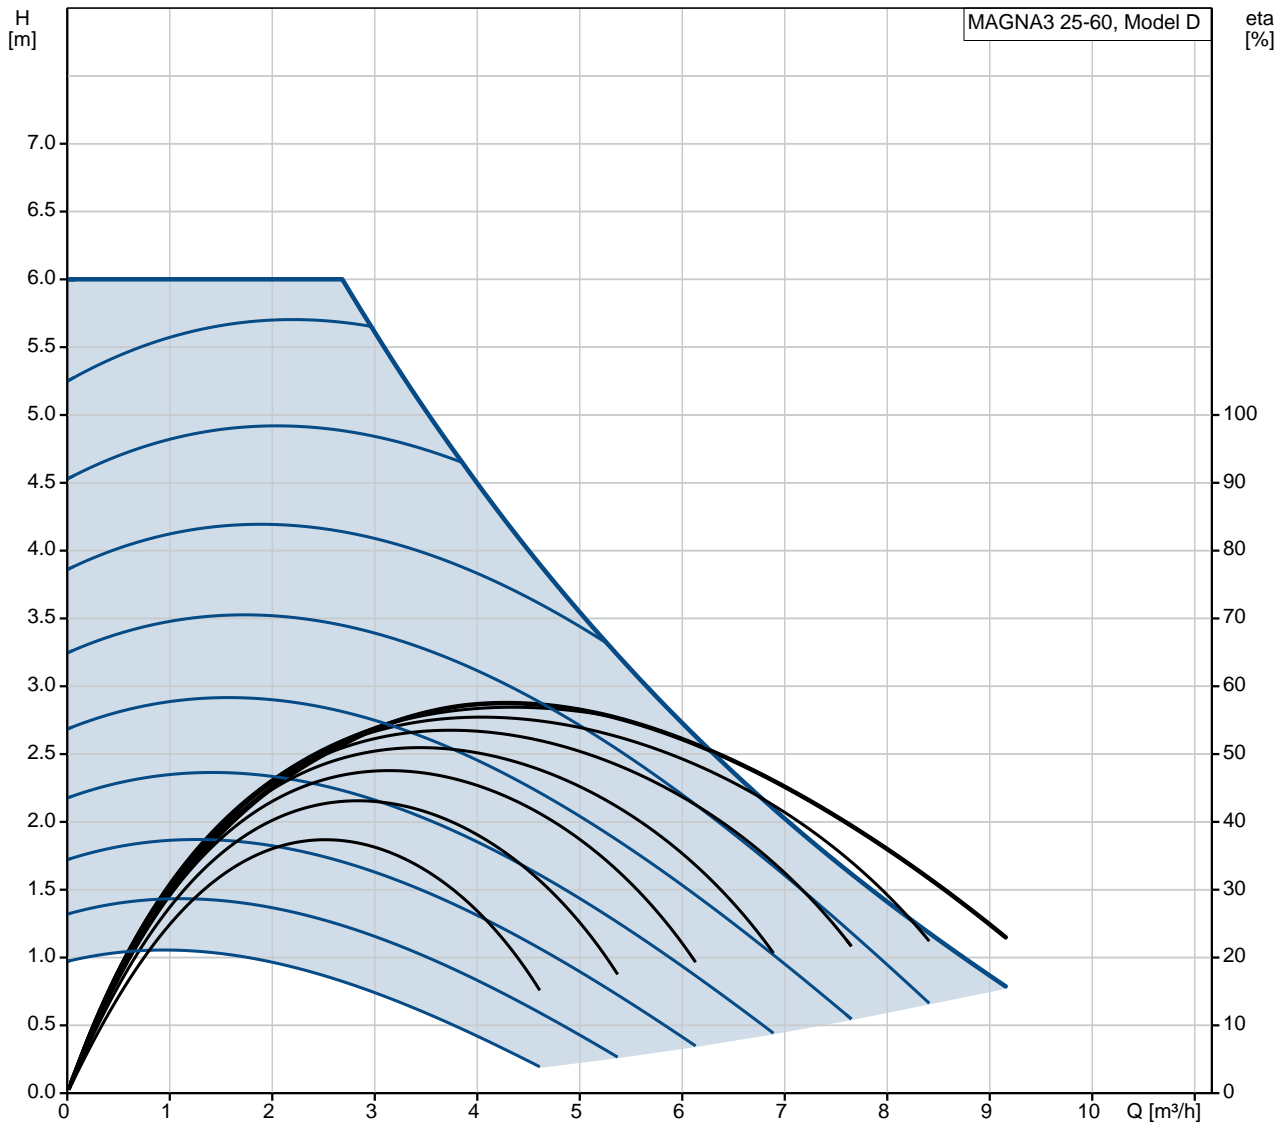

Descriere	Valori i tipuri
<b>Informa ii generale:</b>	
Nume produs::	MAGNA3 25-60
Nr. produs::	97924245
Numărul EAN::	5710626493203
	5710626493203
Pre :	616,65 EUR
<b>Tehnic:</b>	
Debit nominal:	4.8 m <sup>3</sup> /h
Rated head:	3.4 m
În l ime de pompare max.:	60 dm
Clasa TF:	110
Aprob ri pe etichet :	CE,VDE,EAC,CN ROHS,WEEE
Model:	D
<b>Materiale:</b>	
Corpul pompei (stator):	Font EN-GJL-200
Corpul pompei:	ASTM A48-200B
Rotor:	PES 30%GF
<b>Instala ie:</b>	
Gama temperaturii ambientale:	0 .. 40 °C
Presiune de func ionare maxim :	10 bar
Racordarea pompei la instala ie:	G 1 1/2"
Presiune maxim de func ionare:	PN10
Distan a dintre porturi:	180 mm
<b>Lichid:</b>	
Lichid pompat:	Ap
Gama temperaturii lichidului:	-10 .. 110 °C
Temperatura lichidului în timpul func ion rii:	60 °C
Densitate la temperatura lichidului selectat :	983.2 kg/m <sup>3</sup>
<b>Date electrice:</b>	
Putere de introdus - P1:	9 .. 84 W
Frecven a re elei electrice:	50 / 60 Hz
Tensiune nominal :	1 x 230 V
Curent consumat maxim:	0.09 .. 0.75 A
Grad de protec ie (IEC 34-5):	X4D
Clas de izolare (IEC 85):	F
<b>Altele:</b>	
Energie (EEI):	0.18
Greutate net :	4.81 kg
Greutate brut :	5.27 kg
Volum de livrare:	0.015 m <sup>3</sup>
Danish VVS No.:	380790060
Nr. RSK suedez:	5732572
Finnish LVI No.:	4615541
Norwegian NRF no.:	9042326
ara de origine:	DE
Nr. tarif:	84137030

