


Frost R32



NEW



Minimalist design
and easy handling

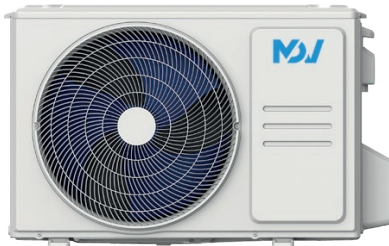

Compressor
crankcase heater



Drain pan
heater



Heating at low
outdoor temp. -25°C



Frost Protect



Hot start



Self-cleaning



Quiet operation



5 steps of fan speed
regulation



Mono and multi
compatible

Technical data

Set				ZFR-09N8-A1	ZFR-12N8-A1	ZFR-18N8-A1	ZFR-24N8-A1
Power supply [V/phase/Hz]				220-240/1/50			
Cooling	Capacity	Rated	kW	2.6	3.5	5.3	7.0
		Min-Max	kW	0.91-3.40	1.11-3.93	0.34-5.83	2.10-7.90
	SEER			7.0	6.5	7.4	6.1
Energy efficiency class				A++	A++	A++	A++
Heating	Capacity	Rated	kW	2.93	3.81	5.60	7.30
		Min-Max	kW	0.82-3.37	1.08-4.16	3.10-5.85	1.60-7.90
	SCOP			4.1	4.1	4.0	4.0
Energy efficiency class				A+	A+	A+	A+
Maximum input power			A	10	10	10	16
Indoor unit dimensions [W × D × H]				715×194×285	805×194×285	957×213×302	1040×220×327
Recommended operating temp. ranges (outdoor)	Cooling	°C	-15-50				
	Heating	°C	-25-30				

*Device submitted. Approval process underway.