

## APLICATII



Aer Conditionat


Inaltime maxima recomandata

6 m  
↑




### Sanicondens Clim mini S

Cod de bare :  
EAN 3308815083520  
CLIMMINI3S

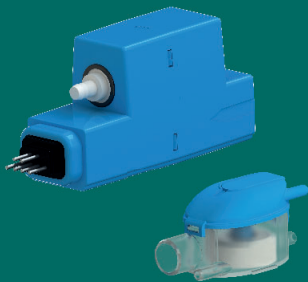

### Sanicondens Clim pack S (elemente mascare albe)

Cod de bare  
EAN 3308815083919  
CLIMPACK3SBL



Shaking up water



## Sanicondens Clim mini S

Noua generatie de pompe pentru aparatele de aer conditionat de perete, conceputa pentru a satisface cerintele pietei, este acum echipata cu cele mai bune caracteristici !

**NOU**  
**21 dB(A)!**




**NOU**

Sistem de alarma (**protectie termica la 130°C**, contact alarma preaplin).  
Unitatea de control are bază transparentă.

Funcționare silențioasă :  
**21 dB(A) only !**

O **pompă compactă** pentru instalare ascunsă

### DIAGRAMA DE OPERARE

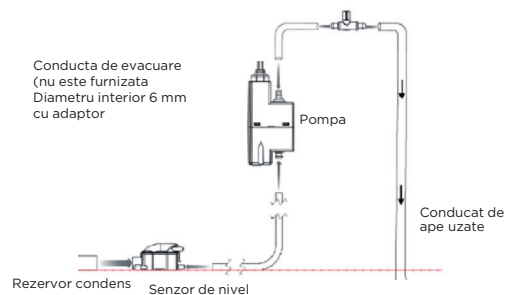

Pompa, unitate de detectie, elemente de mascare (doar pentru Sanicondens Clim pack S)

1.2 m furtun flexibil, suport de fixare, tub aerisire, cablu alimentare inclus

### CARACTERISTICI TEHNICE

Nivel scazut de zgomot	<b>21 dB(A)</b>
Conexiuni posibile	Aer conditionat pana la <b>8 kW / 27 000 BTU</b>
Ø interior intrare	16 mm
Ø interiorn evacuare	6 mm
Debitmaxim	9 l/h +/- 15%
Temperatura maxima a apei la intrare	35 °C
Nivelul maxim de aspiratie dintre unitatea de detectie si pompa)	2 m
Voltaj	220-240 V
Frecventa	50 Hz
Putere	22 W
Index IP	IP20

### DIMENSIUNI - CURBA DE POMPARE

